

MONA-MCK100


Gearless Traction Machine

Màu sắc:




• Voltage	380V
• Roping	2:1
• Load	(320~1000)kg
• Elv. Speed	(1.0~1.75)m/s
• Sheave Diam.	ø320mm
• IP Code	IP41
• Ins. Class	F
• Max. Axle Load	3000kg
• Duty	S5-40%
• Weight	210kg

Brake Type EMK7K DC110V/2x1.3A

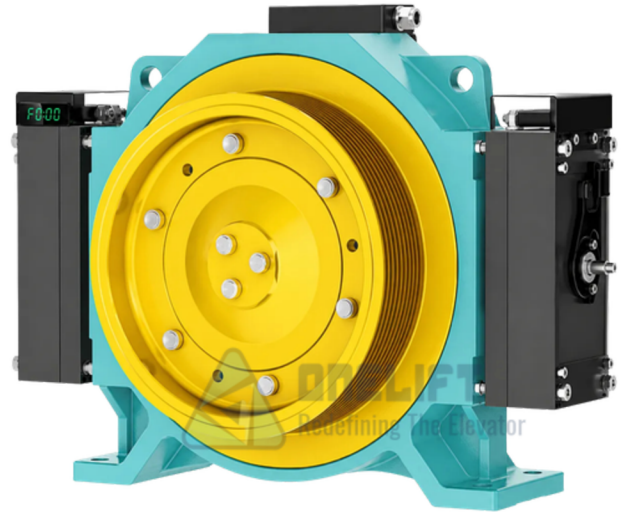

- Máy kéo thang máy MONADRIVE MONA200, Máy kéo không hộp số đồng bộ nam châm vĩnh cửu.
- The machine can also be used for machine roomless, The above is recommended value of cut angle, it's optional according to practical condition.

BẢN VẼ VÀ THÔNG SỐ KỸ THUẬT

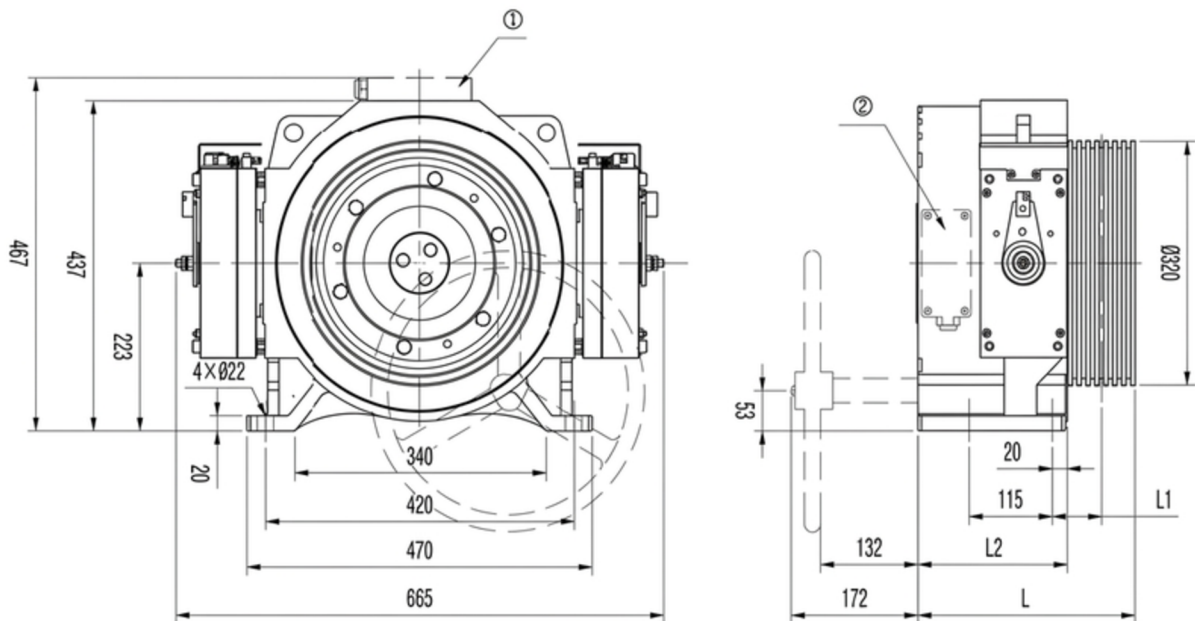

Notes

- Terminal box position when load ≤800kg.
- Terminal box position when load =1000kg.

MÃ HÀNG	Màu sắc	Tải trọng (kg)	Công suất động cơ	Tốc độ (m/s)	Đường kính Puli (mm)	Quy cách cáp tải
MCK100-450-1.0-XN	Xanh ngọc	450	2.7	1.0	320	4 rãnh x cáp ø8
MCK100-450-1.5-XN	Xanh ngọc	450	4.1	1.5	320	4 rãnh x cáp ø8
MCK100-630-1.0-XN	Xanh ngọc	630	3.9	1.0	320	5 rãnh x cáp ø8
MCK100-630-1.5-XN	Xanh ngọc	630	5.8	1.5	320	5 rãnh x cáp ø8